




KEEP AN EYE ON YOUR BUSINESS  
WITH A VRX TEXT INSERTER!



## VR2004 POS Text Inserter is Simple!

ADDRESSING THE NEEDS OF SECURITY  
INSTALLERS AND STORE OWNERS TO HELP  
REDUCE INVENTORY SHRINKAGE.

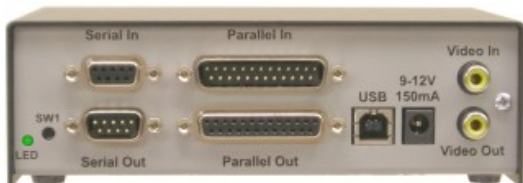

The VR2004 is an easy to use Video Text Inserter. The VR2004 inserts Register Data into CCTV Video that you can record on either a Digital or Analog Recorder. The VR2004 POS Text

Inserter model works with most Cash Registers and POS Systems.

- Simple and Easy to Setup, Typically Delivered Pre-Configured
- Easy to Read High Contrast OSD Font
- Transaction Pacing for Easier Readability
- Keyword Alarm Functions
- Serial Interface Supports Pole Displays and Journal Printers
- Parallel Interface Supports Most Journal Printers
- OSD Configuration and Setup
- Flow-thru Connections for Easy Installation
- Excellent Technical Support

“Text Inserters help reduce Inventory Shrinkage and Employee Theft. VRX can help you provide an effective tool for monitoring your Store.”

The VR2004 is compatible with most applications and equipment, however if you have an application that we do not currently support, we can work with you to provide a solution that works. If we cannot then we offer a 30 day money back guarantee.

Please call to discuss what wiring/accessories may be needed for your installation and for a free quote




# VRX

VRX Company Inc.

PO Box 4663  
Maryville, TN 37802-4663 USA  
(865) 805-2437 (615) 430-0744  
[www.vrxinc.com](http://www.vrxinc.com)  
[sales@vrxinc.com](mailto:sales@vrxinc.com)

## Specifications and Features.

- POS INPUTS: DB9 Serial and DB25 Parallel Combined
- DB9 DEVICES: Serial Pole Displays and Journal Printers, using Flow-thru Connection or Y-Cable Tap
- DB25 DEVICES: Journal Printers and Epson Pole Display with Flow-thru Connections
- VIDEO: Analog CCTV Black and White, or Color Cameras
- PROGRAMMING: Simple OSD Menu
- UPGRADEABLE: FLASH is Field Upgradeable, Does Not Require ROM changes
- FORMATTING: Flexible Device Emulations and Display Format Options, such as Removing Extra Spaces and Lines
- ALARMS: Patent Pending **Area Trigger™**, Flashing Alarms, 4 Alarm Outputs
- KEYWORDS: 4 Keywords are Software Definable for Triggering Alarms
- DISPLAY: Programmable up to 24 Characters per Line, 2-12 Lines
- SERIAL DATA RATES: 1200, 2400, 4800, 9600, 19200, 38400
- OPTIONS: Register Number for Filtering Multiple Registers on One Journal Printer
- POWER: USB 1 Unit Load or Wall Transformer 9-12V @ 150 mA
- WARRANTY: One Year Parts and Labor. See Owners Manual for More Information
- ENCLOSURE: Aluminum with Powder Paint.
- OPERATING TEMP: 0C to 50C
- DIMENSIONS: 6.3" x 4.2" x 2.2"
- WEIGHT: 13 oz

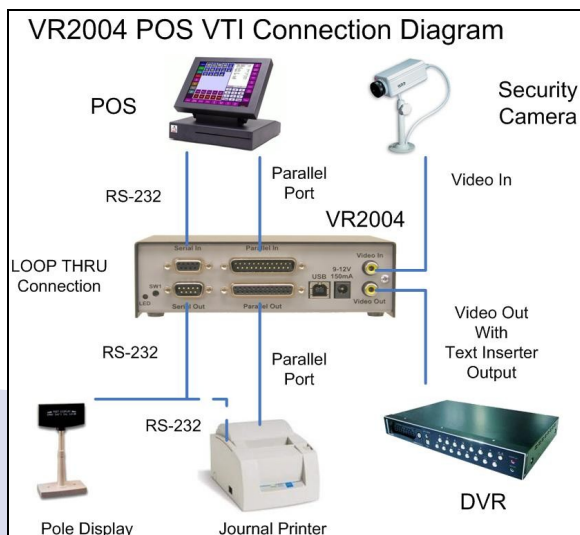

EXAMPLE CONNECTION DIAGRAM:  
INSTALLS JUST LIKE A POLE  
DISPLAY OR JOURNAL PRINTER.

Please call to discuss what wiring/accessories may be needed for your installation and for a free quote



# VRX

VRX Company Inc.

PO Box 4663  
Maryville, TN 37802-4663 USA  
(865) 805-2437 (615) 430-0744  
[www.vrxinc.com](http://www.vrxinc.com)  
[sales@vrxinc.com](mailto:sales@vrxinc.com)